

SHUR-KUT® Coated


Pads

Mandrel mounted pads are available in cross or square construction, both providing specialized use. Durable layers of cloth abrasives allow fresh exposure of new grains as top layers are worn away, providing consistent performance and long life th

Ao CROSS PADS

Flexible fingers easily conform to inside diameters and tubes for cleaning, prep or finishing. Easily deburr or chamfer machined holes with the finesse of handheld tools. Self-centering for smooth, flush wall sanding.

- ▶ Propeller-like design keeps workpiece visible
- ▶ Flex and conform to holes without damage
- ▶ Quickly clean hydraulic cylinders
- ▶ Quick change mandrel design

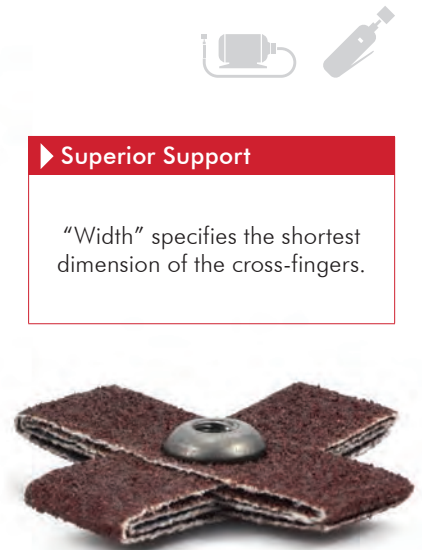

▶ Superior Support

“Width” specifies the shortest dimension of the cross-fingers.

Length	Width	Ply	Eyelet	Max RPM	Std. Pkg.	60	80	120
1"	3/8"	8	3-48	25,000	100	21281	21282	21284
1-1/2"	1/2"	8	8-32	23,000	100	13523	13524	13526
2"	1/2"	8	8-32	23,000	100	13545	13546	13548
2"	3/4"	8	8-32	23,000	100	13567	13568	13570
2"	1"	8	1/4"-20	23,000	100	55729	13590	50480
2-1/2"	3/4"	8	1/4"-20	18,000	100	54881	35922	53699
3"	1"	8	1/4"-20	14,000	100	13743	13744	13746
4"	1"	8	1/4"-20	12,000	50	13787	13788	13790
4-1/2"	1-1/2"	8	1/4"-20	12,000	50	55730	54301	55731
5"	1-1/2"	8	1/4"-20	7,500	50	55521	55732	55522
6"	1-1/2"	8	1/4"-20	7,500	50	55416	54935	55733

● Ferrous ● Non-Ferrous ● Stainless ● Exotic Alloys ● Plastics ○ Composites